


tech BULLETIN

K40™
ELECTRONICS


In order for the K40 receivers to have maximum range and sensitivity, they must be installed horizontally.

Radar is transmitted in a horizontal pattern, therefore the optimum installation direction for the receivers to “receive radar” is to be in a horizontal position.

Installing the receiver vertically will drastically reduce the systems range and selectivity.

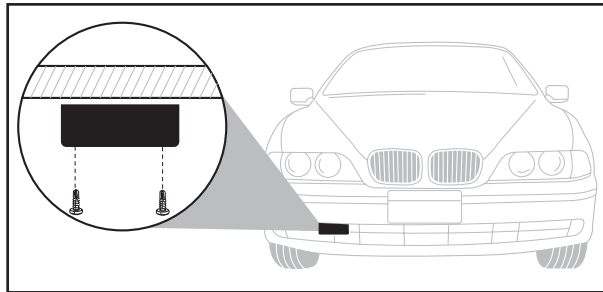

CORRECT

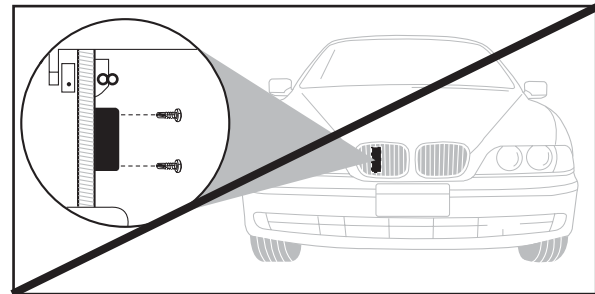

INCORRECT

K40 DAYTIME TECHNICAL SUPPORT - 800-323-5608
24 HR. TECHNICAL SUPPORT - SKY PAGE 1-800-759-7243,
Enter 55880, press # and follow directions.